

**EN**

Run-off frame for pipes installations with **ø 150 - 750 mm**.

Composed by:

- galvanized steel frame
- two running rollers made of **galvanized steel** mounted on shielded ball bearings

D

Kabelleit- und Ablaufbock zur Verlegung von Leerrohren **ø 150 - 750 mm**.

Bestehend aus:

- verzinkten Stahlrahmen
- zwei Rollen aus **verzin-ktem Stahl**, gelagert mit-tels doppelt geschützter Kugellager

E

Rodillo centrador para colocación de tubería con un ø da **150 - 750 mm**

Compuesto de:

- bastidor en acero cincado
- dos rodillos de desliza-miento en **acero cincado** montados sobre cojinetes de esferas apantallados

F

Galet en V pour la pose de conduits avec **ø 150 - 750 mm**. Comprenant:

- un châssis en acier galvanisé
- deux galets en **acier galvanisé** montés sur roulements à billes blindés

I

Cavaletto per la posa di tubazioni da **ø 150 - 750 mm**.

Composto da:

- telaio in acciaio zincato
- due rulli di scorrimento in **acciaio zincato**, montati su cuscinetti a sfere schermati

Accessories • Zubehör • Accesorios • Accessoires • Accessori

[1] Spare roller comes complete of screwed shaft M12, ball-bearings, nuts and bolts.

[1] Ersatzrolle aus verzinktem Stahl, mit Gewindestift M12, Kugellager, Beilagscheiben und Mutter.


[1] Rodillo de repuesto con perno roscado M12, cojinetes, arandelas y bulones.

[1] Galet de rechange muni d'axe fileté M12, roulements, rondelles et boulons.

[1] Rullo di ricambio, completo di perno filettato M12, cuscinetti, rondelle e bulloni.

[1]**FE****art.**

JRVB7501000RUL

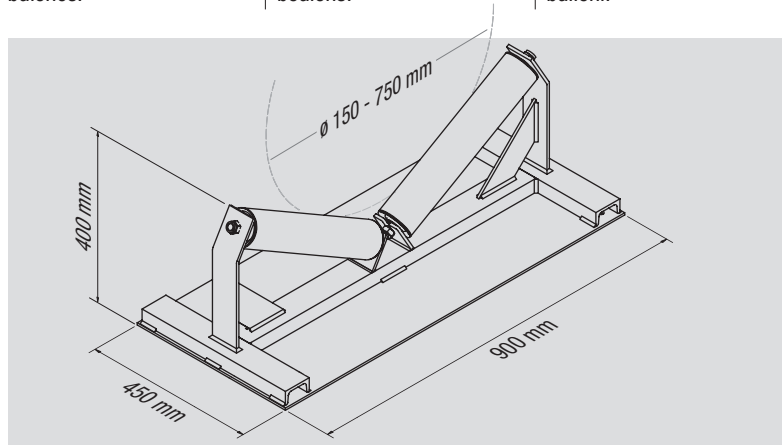

900 x 450 x 400 mm	34 kg	1000 daN	ø 150 - 750 mm	ø 60 x 460 mm