



EN

PERLON® fishtape ø 4 mm with **pressed** terminals, complete of flexible starting spinner with eyelet and starting spinner with eyelet.

D

Einziehband in PERLON® ø 4 mm mit Federführungskopf mit Öse und Zugkopf mit Öse, **direkt verpresst**.

E



PERLON® pasacables ø 4 mm con cabeza guía flexible y anilla de enganche, terminales **fijos**.


F

Tire-fils en PERLON® ø 4 mm avec des terminaux **fixes**, tête flexible et embout.

I

Sonda passacavi in PERLON® ø 4 mm con terminali fissi **pressati**, completa di testa flessibile con asola e ogiva iniziale con asola.

art.	ø mm	m	gr		RAL
GVNYL405NP	4	5	88	20	9017 
GVNYL410NP		10	165	20	
GVNYL415NP		15	235	20	
GVNYL420NP		20	305	20	
GVNYL425NP		25	380	10	
GVNYL430NP		30	455	10	

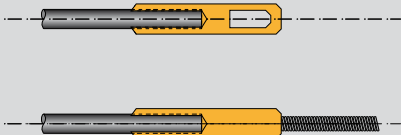



PERLON® fishtape ø 4 mm with **interchangeable** terminals M4, complete of flexible starting spinner with eyelet and starting spinner with eyelet.

Einziehband in PERLON® ø 4 mm mit **austauschbaren Endstücken M4**; Federführungskopf mit Öse und Zugkopf mit Öse.

PERLON® pasacables ø 4 mm con cabeza guía flexible y anilla de enganche, terminales **intercambiables, M4**.

Tire-fils en PERLON® ø 4 mm avec des terminaux, tête flexible et embout **interchangeables, M4**.

Sonda passacavi in PERLON® ø 4 mm con terminali **intercambiabili M4**, completa di testa flessibile con asola e ogiva iniziale con asola.

art.	ø mm	m	gr		RAL
GVNYL405NI	4	5	93	20	9017 
GVNYL410NI		10	170	20	
GVNYL415NI		15	240	20	
GVNYL420NI		20	310	20	
GVNYL425NI		25	385	10	
GVNYL430NI		30	460	10	

