



STANDARD

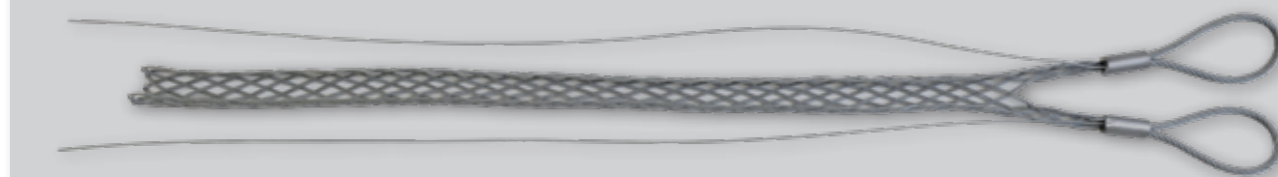

[EN] Cable pulling grip with two eyes without thimble, laterally open, including two closing wires [D] Kabelziehstrumpf mit zwei Schleifen, seitlich offen mit zwei Bindelitzen [E] Malla tiracables con doble lazo sin dedales, con un lado abierto y dos hilos de coser [F] Chaussette tire-câbles a lacet, sans boucle double et cosse coeur, ouvert latéralement [I] Calza tiracavi con due asole senza redancia, lateralmente aperta con due fili di legatura

art.	ø mm	L mm	L ₁ mm				n.		[mm]	kg
JST312/15A	10-15	1500	1250	3.000 daN	4	1,50 mm		7	6 x 100	0,31
JST312/20A	15-20	1500	1250	3.000 daN	5	1,50 mm		7	6 x 100	0,33
JST312/30A	20-30	1500	1250	3.000 daN	5	1,50 mm		7	6 x 100	0,37
JST312/40A	30-40	1550	1250	3.500 daN	6	1,50 mm		7	6 x 150	0,41
JST312/50A	40-50	1550	1250	3.500 daN	6	1,50 mm		7	6 x 150	0,44
JST312/60A	50-60	1550	1250	3.500 daN	6	1,50 mm		7	6 x 150	0,48
JST312/70A	60-70	1550	1250	4.100 daN	7	1,50 mm		7	8 x 150	0,52
JST312/080A	60-80	1550	1250	4.700 daN	8	1,50 mm		7	8 x 150	0,54
JST312/80A	70-80	1550	1250	4.700 daN	8	1,50 mm		7	8 x 150	0,56
JST312/90A	80-90	1550	1250	4.700 daN	8	1,50 mm		7	8 x 150	0,58
JST312/100A	80-100	1550	1250	9.400 daN	8	2,00 mm		7	8 x 150	0,58
JT312/100A	90-100	1600	1250	9.400 daN	8	2,00 mm		7	10 x 200	0,94
JST312/110A	90-110	1600	1250	9.400 daN	8	2,00 mm		7	10 x 200	0,94
JT312/110A	100-110	1600	1250	11.000 daN	10	2,00 mm		7	10 x 200	0,98
JST312/120A	100-120	1600	1250	11.000 daN	10	2,00 mm		7	10 x 200	1,03
JT312/120A	110-120	1600	1250	11.000 daN	10	2,00 mm		7	10 x 200	1,09
JST312/130A	120-130	1600	1250	11.000 daN	10	2,00 mm		7	10 x 200	1,15
JST312/150A	120-150	1600	1250	11.000 daN	10	2,00 mm		7	10 x 200	1,19
JST312/140A	130-140	1650	1250	14.000 daN	12	2,00 mm		7	10 x 200	1,23
JT312/150A	140-150	1650	1250	14.000 daN	12	2,00 mm		7	10 x 200	1,28

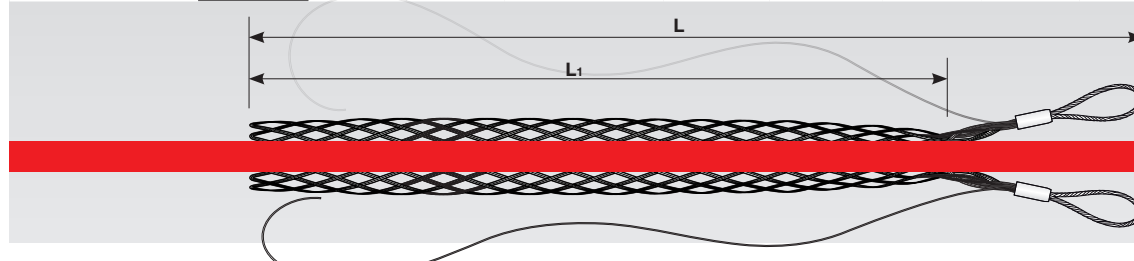

! HOW TO USE
p. 112

