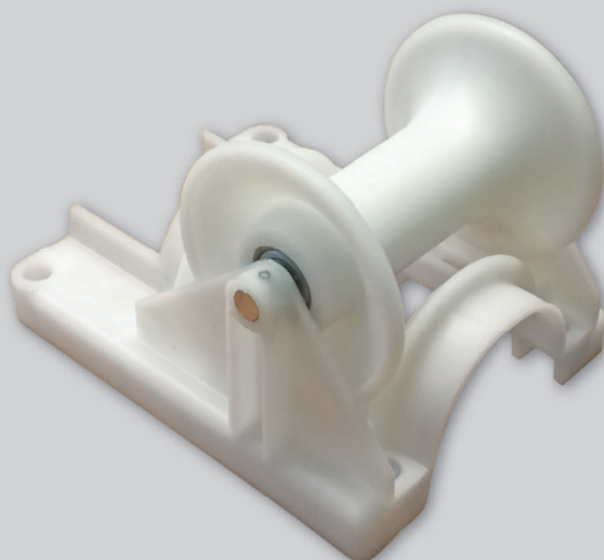
**JZKVR171P****EN**

Cable laying ground roller fit for installations cables with $\varnothing$ 190 mm max.

Composed by:

- **Nylon** frame
- running roller made of **Nylon** mounted on shielded ball bearings

D

Kabelverlegerolle zur geradlinigen Verlegung von Kabeln bis zu einem $\varnothing$ von 190 mm
Bestehend aus:

- Rahmen aus **Nylon**
- Rolle aus **Nylon**, gelagert mittels doppelt geschützter Kugellager

E

Rodillo para colocar cables adecuado para la colocación en línea recta de cables con un $\varnothing$ máx. de 190 mm
Compuesto de:

- bastidor en **Nylon**
- rodillo de deslizamiento en **Nylon** montado sobre cojinetes de esferas apantallados

F

Galet de tirage de câbles convenant pour le tirage rectiligne de câbles du $\varnothing$ de 190 mm max.

Comprenant:


- un châssis en **nylon**
- un galet en **nylon** monté sur roulements à billes blindés

I

Rullo posacavi adatto per la posa in rettilino di cavi fino al $\varnothing$ 190 mm max.

Composto da:


- telaio in **Nylon**
- rullo di scorrimento in **Nylon** montato su cuscinetti a sfere schermati

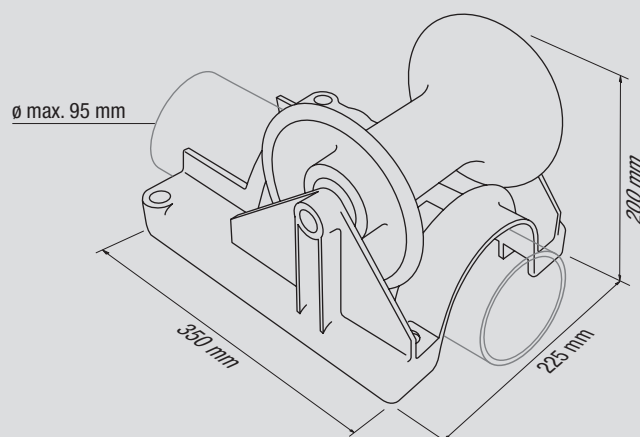

350 x 225 x 200 mm



2,2 kg



200 daN

 $\varnothing$ 180 mm $\varnothing$ 60 - 145 x 170 mm